


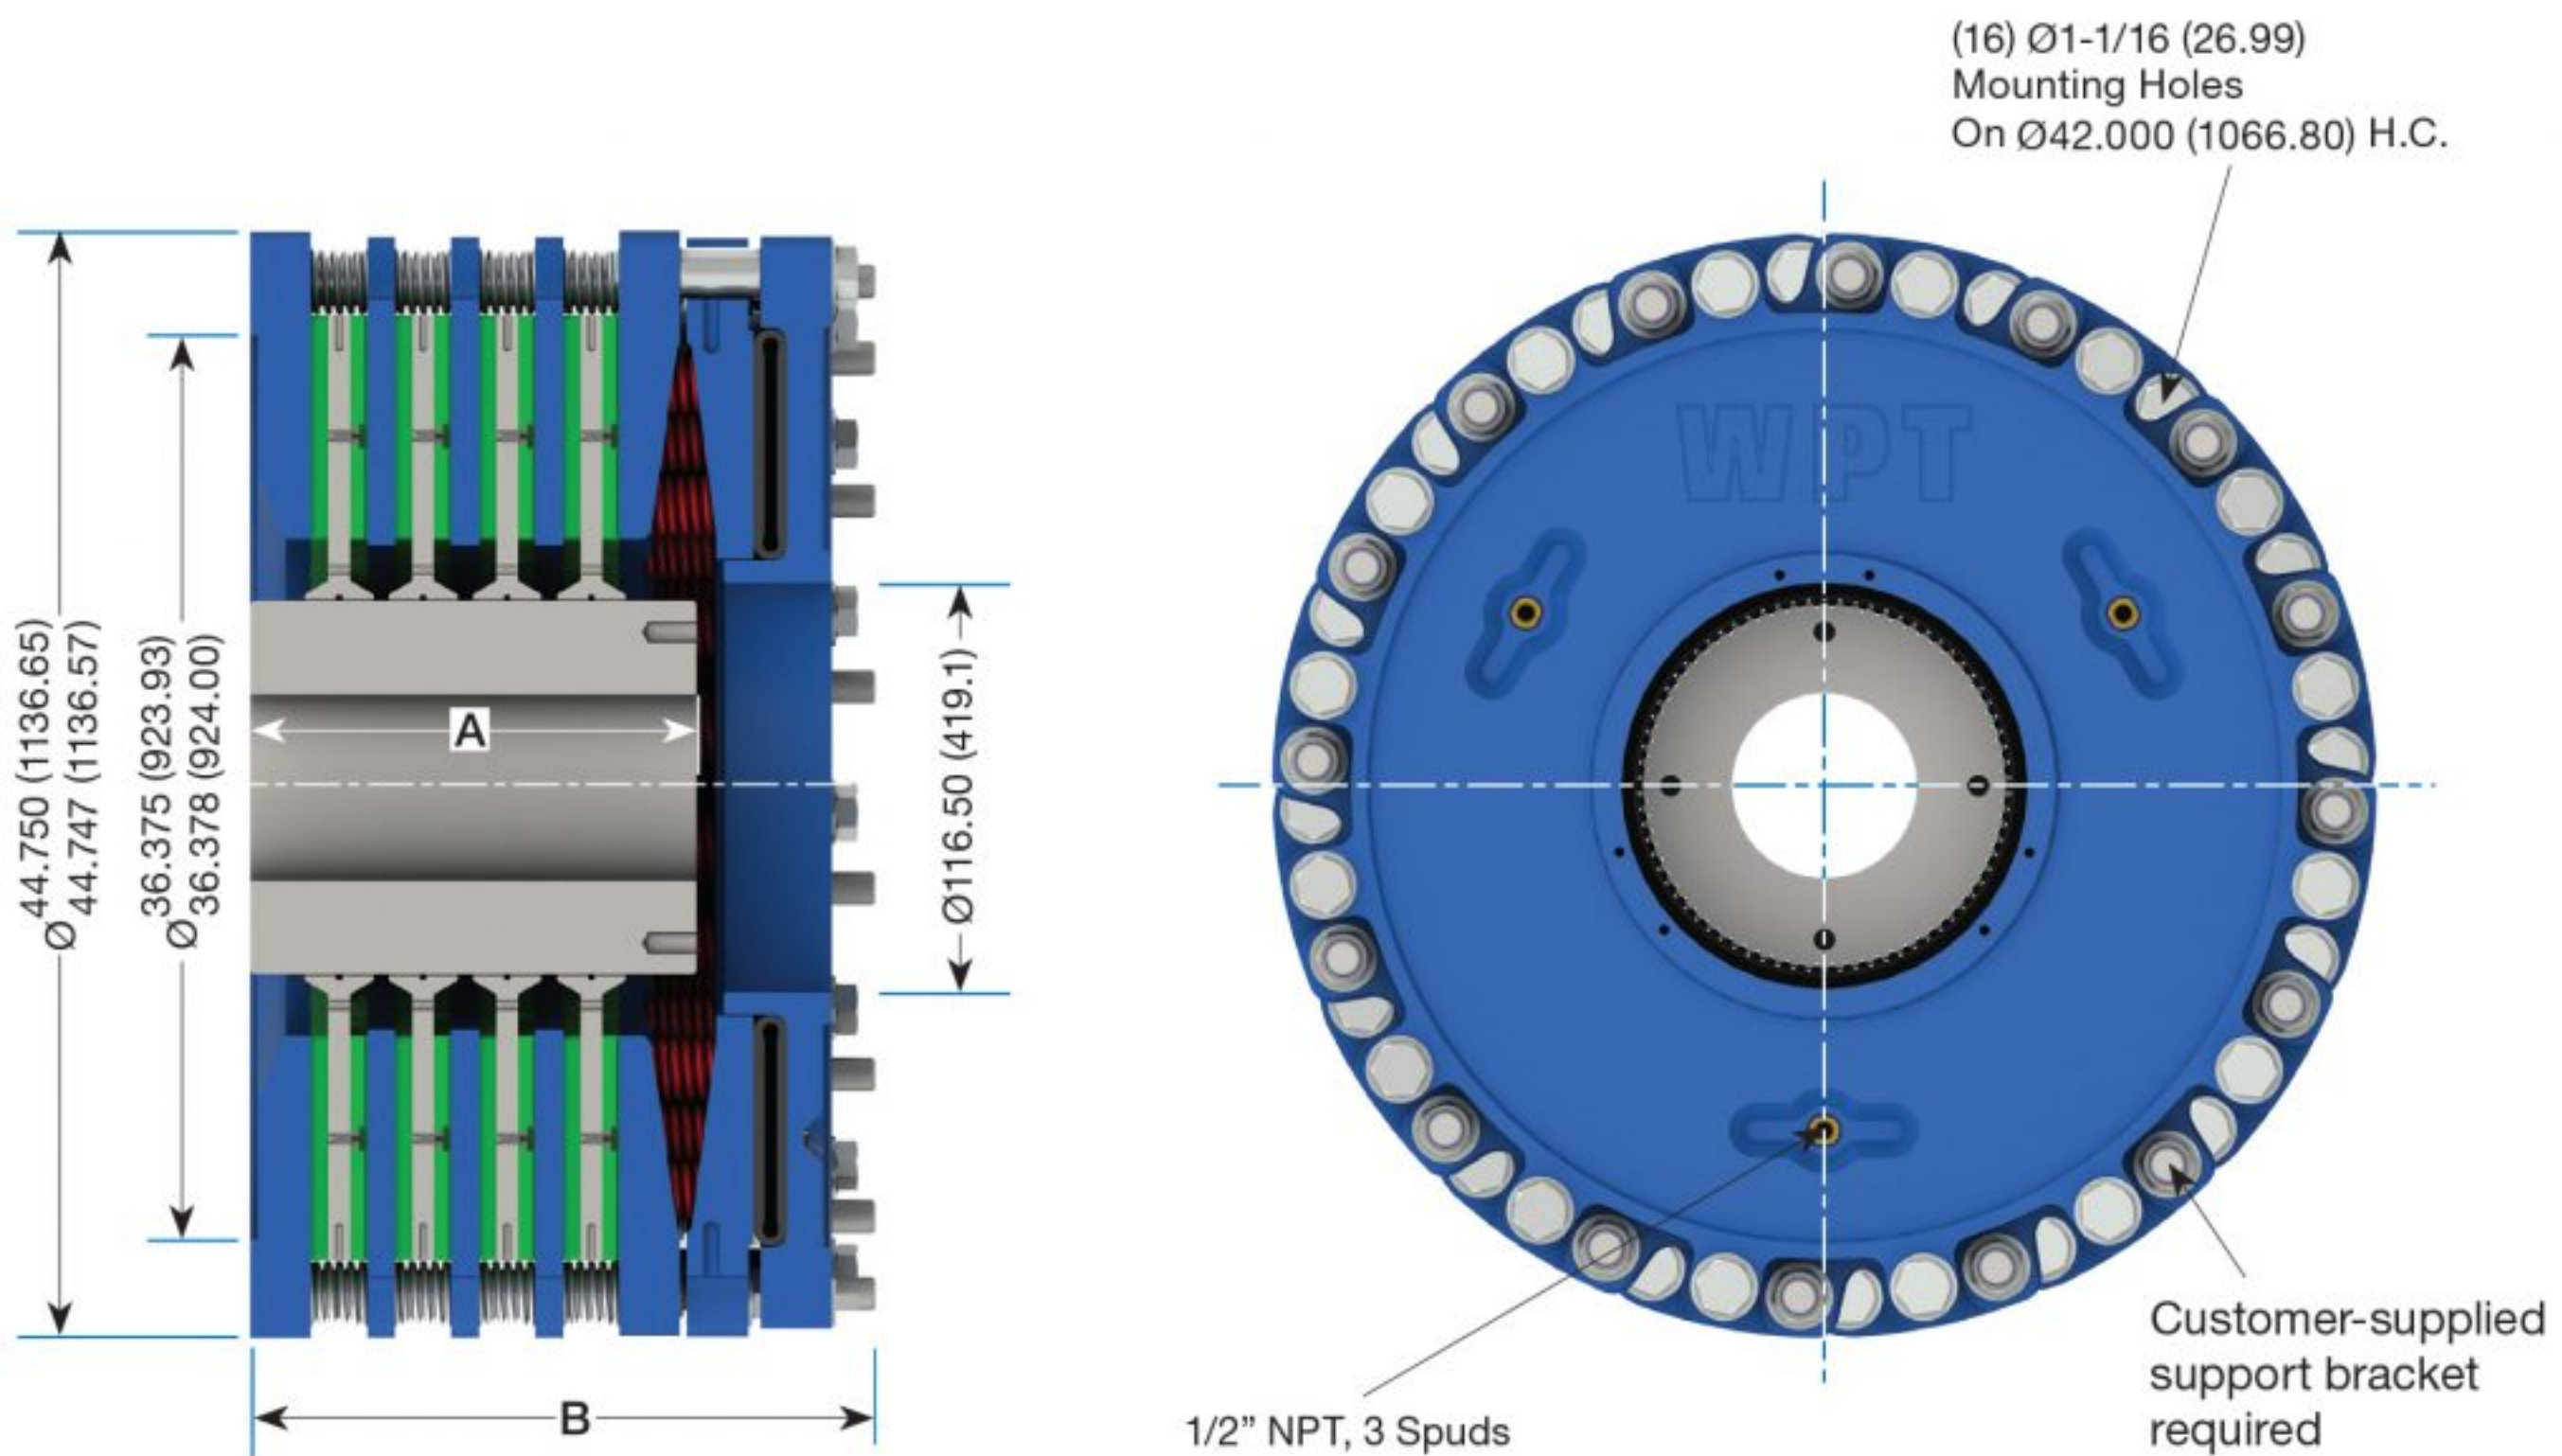

Model	A	B	Static Torque @ 100 psi* lbf-in (N·m)	Dynamic Torque @ 100 psi* lbf-in (N·m)	Maximum Speed r/min	Hub & Centerplates		Max Bore in (mm)	Weight lb (kg)
						lb (kg)	lbf-ft ² (kg·m ²)		
238	9" (228.6)	17 1/4" (438.0)	1418600 (160300)	1063900 (120200)	950	960 (435)	1090 (45.8)	10.13 (257)	3000 (1360)
338	12" (304.8)	20 5/8" (523.9)	2078500 (234900)	1558900 (176100)	950	1440 (653)	1630 (68.8)	10.13 (257)	4150 (1900)
438	18" (457.2)	25" (635.1)	2669900 (301700)	2002400 (226300)	950	1920 (871)	2170 (91.5)	10.13 (257)	5250 (2380)

* May be reduced by up to 15% when worn.

* Torque based on EXHI-CO product offering.